

HK-HC250-S(P)(A)-NT

5.0Megapixel H.265 fixed lens IP Bullet Camera

Key Features

※ 1/2.7"SC501AI Black light illumination CMOS sensor;2880*1616@25fps

Color 0.0001Lux@F1.2,black/white 0.0001Lux@F1.2

※ H.265AI/H.265+(Compatible with H.265/H.264)Support dual stream

AVI;0.1M~8Mbps variable;1~30f/s variable

※ Alarm I/O: 1/0 (support alarm input and video link to background)

※ Supporting human detection and tripping line detection, and supports intelligent functions such as customized face detection, number statistics, etc

※ Support 2D/3D noise reduction,digital wide dynamic



※2pcs white lights and 2pcs infrared lights,Night Vision Up to 40M

※ 2.8/4/6/8mm fixed lens

※ DC 12V power supply (customizable Poe power supply)

※ IP67

※ Support ONVIF;access third party, Support various mobile monitoring(iPhone,Android)

※ Provide web、CMS、center platform management software MYEYE,provide SDK development

※ Support cloud technology,easy to achieve network penetration,fro in-line and alarm information pushed

Reasons for choosing

9 upgrade features to meet monitoring needs



Wire supply



Day and night switching



Infrared night vision



30 meters infrared



100-meter transmission



Cell phone remote



Intruder alert



Water and dust proof



Install portable

Infrared night vision

Latest infrared technology

Fill light more uniform infrared night vision without light can see clearly



Frame rate:25

Noise reduction: 3D

Resolution: 1920*1080

Compression Standard:H.265

Super HD Live Demo

Two million ultra-clear shots of the real thing



Camera aging box

Each camera requires a rigorous aging time of more than 24 hours



Warehouse


Product to be released from storage



Suitable for various environment, Wall Mounting & Lifting



Warehouse

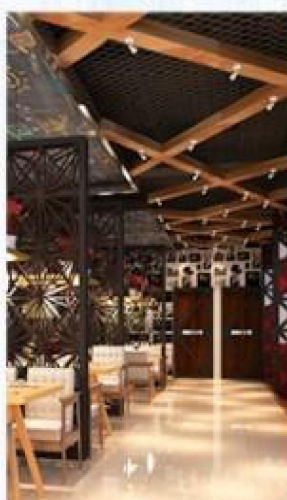

Restaurants



Garages

Cell phone remote

Multi-terminal support for MOBILE/TABLET/PC


Monitor your home from time to time



Multi-focal length optional

Dual seal handling supports waterproof and dustproof

Easy to handle rain and snow weather indoors and outdoors

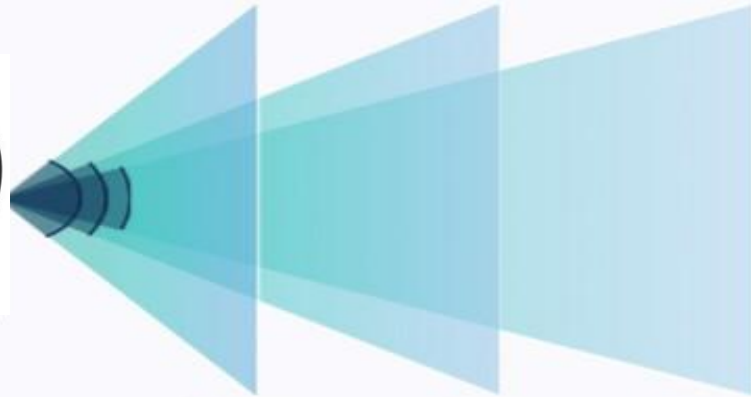

| | | | |
|-------------------------|--------|-------|-------|
| Lens size | 2.8mm | 4mm | 6mm |
| Surveillance Angle | 114.6° | 89.1° | 54.4° |
| Identification Distance | 4M | 7M | 13M |



Focal length : 2.8MM Angle of view : 114.6°



Focal length : 4MM Angle of view : 86.2°



Focal length : 6MM Angle of view : 54.4°

More features (support for customization)



Built in Microphone



Two Way Audio



POE



WLAN



SD

More products (optional)



Specification

| Model | | HK-HC250-S(P)(A)-NT |
|---------------------|------------------------|--|
| Camera | Image Sensor | 1/2.7"SC501AI Black light illumination CMOS sensor |
| | DSP | XM530AI |
| | Min. Illumination | Color: 0.001Lux/F1.2, B/W: 0.0001Lux/F1.2; 0Lux/F1.2(IR on) |
| | Effective Pixels | 2880(H)*1616(V) |
| | Scanning System | Progressive |
| | Shutter | 1/50(1/60)s to 1/10,000s |
| | Noise reduction | Support 2D/3D |
| | Wide dynamic | Support digital |
| Camera Features | Max. IR LEDs Length | 30-40m (2pcs white lights and 2pcs infrared lights) |
| | Day/Night | Auto(ICR)/Color/B/W |
| | Backlight Compensation | BLC / HLC / DWDR |
| | White Balance | Auto |
| | Gain Control | Auto/Manual |
| | Alarm triggered | Motion Detection, occlusion alarm, anomaly |
| | SMART event | Perimeter breach detected |
| | Intelligence analysis | Supporting human detection and tripping line detection |
| Lens | Focal Length | 2.8/4/6/8mm fixed lens (Optional) |
| | Max Aperture | F2.0 |
| | Focus Control | Fixed |
| Video | Video compression | H.265AI/H.265+(Compatible with H.265/H.264),support dual stream,AVI;0.1M~8Mbps variable;1~30f/s variable |
| | Resolution | 1080P(1920*1080) / 720P(1280*720) ; D1(704*576)/ CIF(352*288) |
| | Main Stream | 1080P/720P(1 ~ 25fps) |
| | Sub Stream | D1/CIF(1 ~ 25fps) |
| | Bit Rate | H.265 < H.264: 32K ~ 8192Kbps, MJPEG: 32K ~ 20480Kbps |
| Network | Network interface | 1*RJ45 10/100M adaptive Ethernet port; support RTSP/FTP/DHCP/NTP/UPnP etc |
| | Protocol | IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour |
| | ONVIF | Support |
| | Max. User Access | 10 users |
| | Smart Phone | iPhone, iPad, Android, Windows Phone |
| | Client port | VMS/CMS; XMeyey |
| Auxiliary Interface | Memory Slot | N/A |
| | Alarm | N/A |
| | Audio | Optional |
| General | Power Supply | DC 12V power supply (customizable Poe power supply) |
| | Power Consumption | <8W |
| | Working Environment | -30°C~+60°C, 10%~90% |
| | Ingress Protection | IP67 |
| | Dimensions | 200*150*150mm |
| | Weight | 1Kg |